

AGREEMENT FOR VOLUNTARY RIGHT OF WAY DONATION

PROJECT NO: 22219.00.00 COUNTY: Brookings PARCEL NO: N/A
This agreement made and entered into this day of , 2016
by and between Brookings County acting by and through the Brookings
County Commission, hereinafter referred to as COUNTY, and David G. Berndt Et
Ux. & Dawna F. Berndt, whose postal address is 47922 206th Street
White, SD 57276, hereinafter referred to as DONOR.

WHEREAS, COUNTY needs the following easements for construction,
operation and maintenance of a highway:

Perpetual Easement: None.

Temporary Easement: 0.24 acres more or less in the NE 1/4 of
Sec. 24-T111N-R49W (between project stations 8+00 Lt. & 12+00 Lt.)

NOW THEREFORE, DONOR understands his/her right to have an appraisal
prepared and his/her right to receive just compensation for the above
described perpetual and/or temporary easement in accordance with the Uniform
Relocation Assistance and Real Property Acquisition Act of 1970, as amended.
DONOR does hereby voluntarily grant and donate to COUNTY, for and in
consideration of and other good and valuable consideration, the adequacy
of which is hereby acknowledged by DONOR, the above described easements as
shown on the plans for construction of the above cited PROJECT.

Stipulations of conditional donation:

DONOR agrees that the erection of fences, structures or obstacles within
the perpetual easement will not be permitted.

DONOR grants permission to COUNTY or COUNTY'S agent to enter upon above
described easement upon approval of this AGREEMENT.

The perpetual easement shall be in effect until the highway is abandoned
by proper action of the Brookings County Commission and the temporary
easement shall be in effect until construction of the project is completed.

IN WITNESS WHEREOF, the parties hereto have caused this AGREEMENT to be
executed.

Attest:
County Auditor

By: DJ Belt
Donor


By:
Chairman of County Commission

By:
Donor

STATE OF
COUNTY OF

By:
Donor

On this 28 day of June in the year of 2016 before
me, Richard Birk, a Notary Public within and for
said State, personally appeared Dawna Berndt
known to me to be the person(s) described
and who executed the foregoing instrument and acknowledged to me that
he/she/they executed the same for the purpose therein stated.

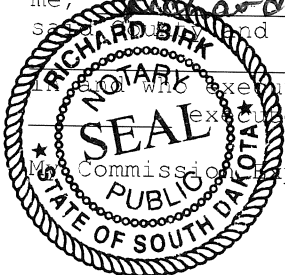

My Commission Expires: August 10, 2021

Richard Birk
Notary Public

STA. 9+20 - 33' LT. TO 50' LT. TO
STA. 10+70 - 33' LT. TO 50' LT.
PERMANENT EASEMENT FOR CONSTRUCTION
OF 67'-0" PRESTRESSED CONCRETE DOUBLE
TEE BRIDGE CONTAINING 0.06 ACRES, MORE
OR LESS (TO BE OBTAINED BY BROOKINGS
COUNTY W/O FEDERAL PARTICIPATION).

STA. 8+00 - 33' LT. TO 65' LT. TO
STA. 12+00 - 33' LT. TO 65' LT.
TEMPORARY EASEMENT FOR MAINTENANCE
OF 67'-0" PRESTRESSED CONCRETE DOUBLE
TEE BRIDGE CONTAINING 0.24 ACRES, MORE
OR LESS (TO BE OBTAINED BY BROOKINGS
COUNTY W/O FEDERAL PARTICIPATION).

DAVID G. BERNDT ETUX.
& DAWNA F. BERNDT
47922 206TH ST.
WHITE, SD. 57276
(605) 629-4521


SEC. 24-T111N-R49W

STA. 9+34.50 TO STA. 10+51.50
INSTALL CLASS B RIPRAP & TYPE B
DRAINAGE FABRIC (SEE SHEET 27
OF 29).

STA. 9+74.75 TO STA. 10+25+25
IN-PLACE 50.5' LONG x 31.8' WIDE
TWO-SPAN CONCRETE DECK UNIT
BRIDGE (TO BE REMOVED AS
INCIDENTAL WORK, STRUCTURE)

STATE OF SOUTH DAKOTA	PROJECT	SHEET No.	TOTAL SHEETS
	22219.00.00	16	29

END PROJECT
STA. 12+58.14
700± SOUTH OF NW CORNER
OF SEC. 19 - T111N - R48W

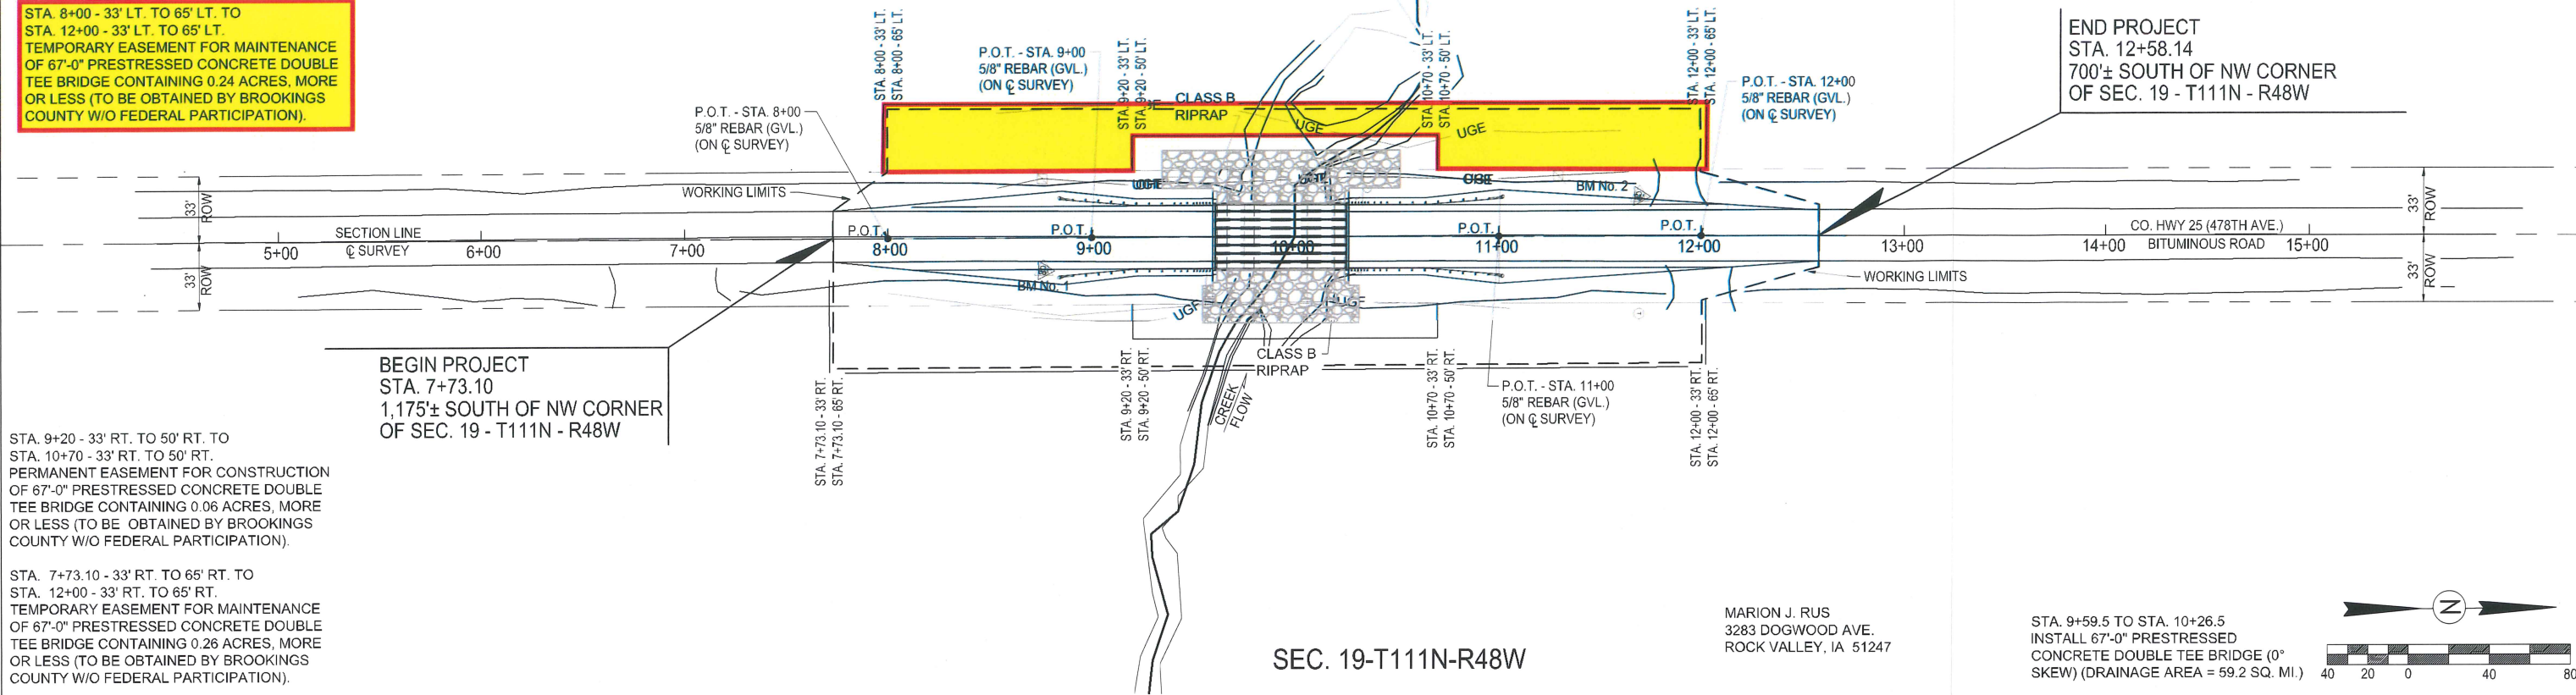


STA. 9+20 - 33' RT. TO 50' RT. TO
STA. 10+70 - 33' RT. TO 50' RT.
PERMANENT EASEMENT FOR CONSTRUCTION
OF 67'-0" PRESTRESSED CONCRETE DOUBLE
TEE BRIDGE CONTAINING 0.06 ACRES, MORE
OR LESS (TO BE OBTAINED BY BROOKINGS
COUNTY W/O FEDERAL PARTICIPATION).

STA. 7+73.10 - 33' RT. TO 65' RT. TO
STA. 12+00 - 33' RT. TO 65' RT.
TEMPORARY EASEMENT FOR MAINTENANCE
OF 67'-0" PRESTRESSED CONCRETE DOUBLE
TEE BRIDGE CONTAINING 0.26 ACRES, MORE
OR LESS (TO BE OBTAINED BY BROOKINGS
COUNTY W/O FEDERAL PARTICIPATION).

BEGIN PROJECT
STA. 7+73.10
1,175± SOUTH OF NW CORNER
OF SEC. 19 - T111N - R48W

MARION J. RUS
3283 DOGWOOD AVE.
ROCK VALLEY, IA 51247

STA. 9+59.5 TO STA. 10+26.5
INSTALL 67'-0" PRESTRESSED
CONCRETE DOUBLE TEE BRIDGE (0°
SKEW) (DRAINAGE AREA = 59.2 SQ. MI.)

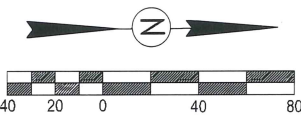


NOTE:
ROADWAY ELEVATIONS SHOWN
ARE AT CENTERLINE OF NEW
ROADWAY.

BENCHMARK No. 1
ELEV. = 1751.32
5/8" DIA. REBAR
STA. 8+45 - 17' RT.

BENCHMARK No. 2
ELEV. = 1750.66
5/8" DIA. REBAR
STA. 11+70 - 20' LT.

EXCAVATION	= 600 C.Y.	EMBANKMENT	= 978 C.Y.
SALVAGE TOPSOIL	= 275 C.Y.	+30%	= 293 C.Y.
BORROW	= 396 C.Y.		
	1271 C.Y.		1271 C.Y.

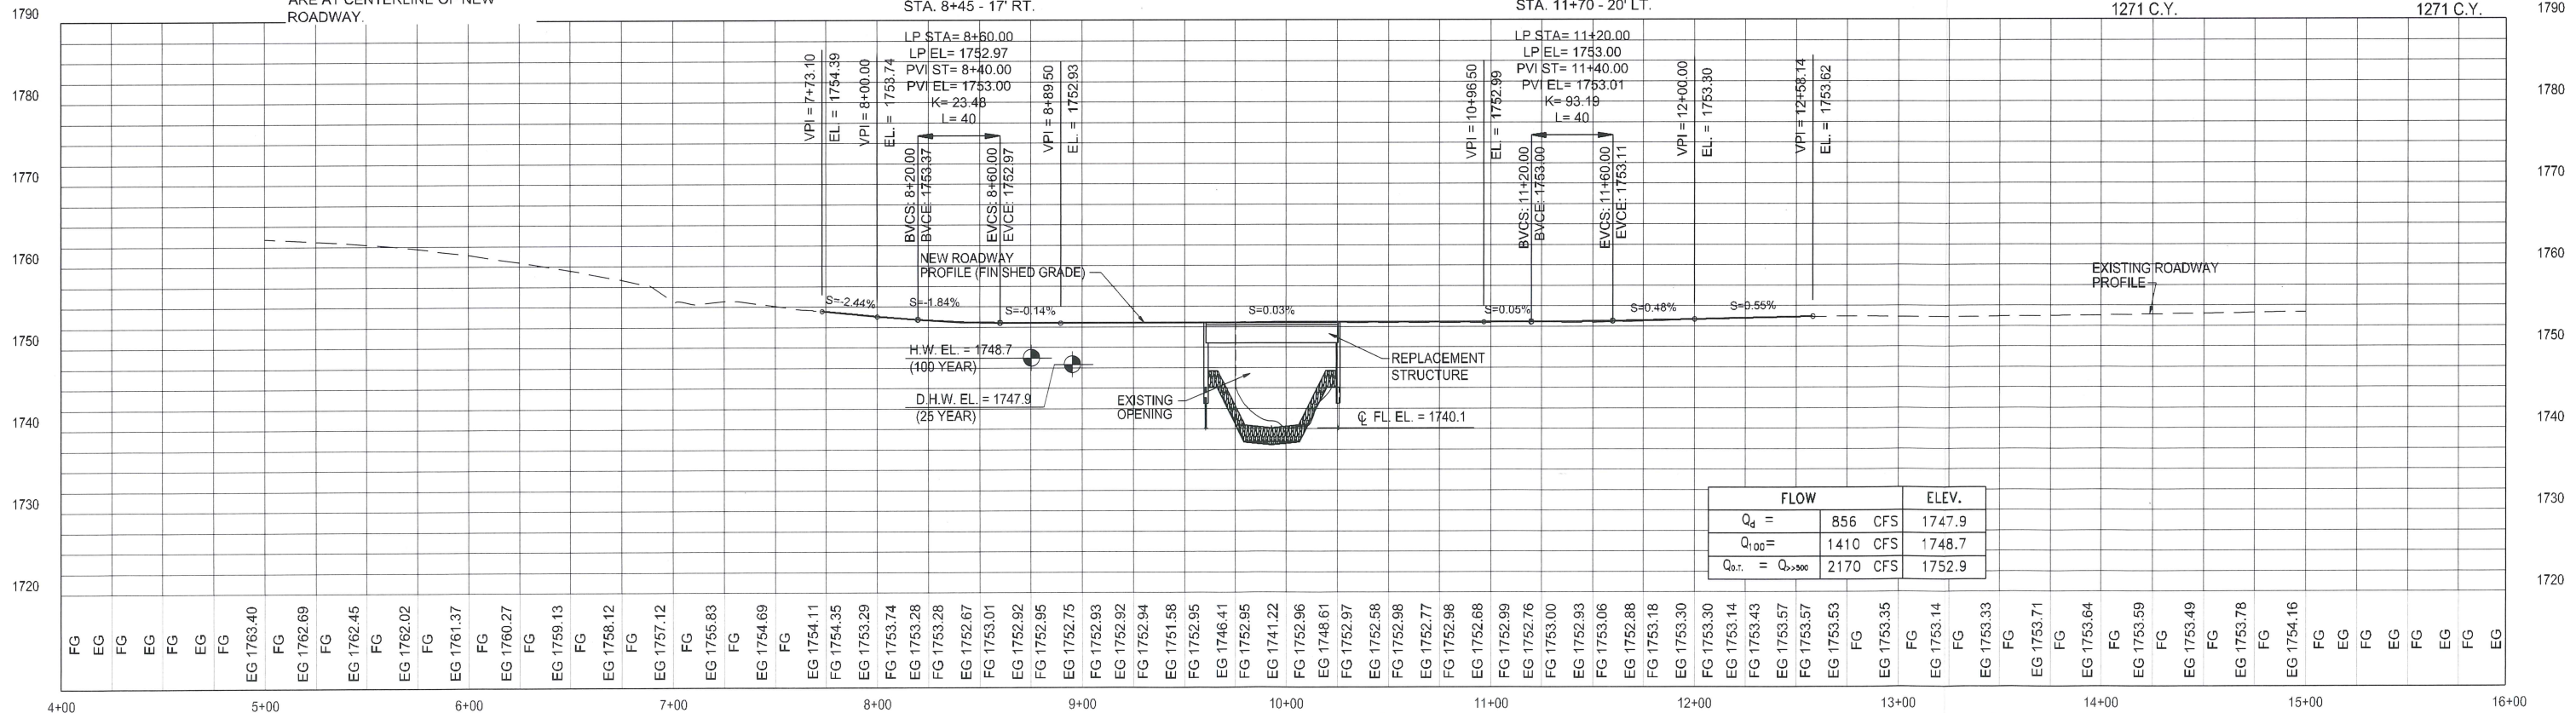

FLOW		ELEV.
$Q_d =$	856 CFS	1747.9
$Q_{100} =$	1410 CFS	1748.7
$Q_{0.1} = Q_{0.001}$	2170 CFS	1752.9

ROADWAY PROFILE